



(12) **EUROPEAN PATENT APPLICATION**

(43) Date of publication:  
**23.07.2003 Bulletin 2003/30**

(51) Int Cl.7: **H04N 5/00, H04N 5/76**

(21) Application number: **03250351.8**

(22) Date of filing: **21.01.2003**

(84) Designated Contracting States:  
**AT BE BG CH CY CZ DE DK EE ES FI FR GB GR**  
**HU IE IT LI LU MC NL PT SE SI SK TR**  
 Designated Extension States:  
**AL LT LV MK RO**

(72) Inventor: **Ono, Kenichiro,**  
**c/o Canon Kabushiki Kaisha**  
**Ohta-ku, Tokyo (JP)**

(74) Representative:  
**Beresford, Keith Denis Lewis et al**  
**BERESFORD & Co.**  
**2-5 Warwick Court,**  
**High Holborn**  
**London WC1R 5DH (GB)**

(30) Priority: **22.01.2002 JP 2002013103**  
**15.01.2003 JP 2003006889**


(71) Applicant: **CANON KABUSHIKI KAISHA**  
**Tokyo (JP)**

(54) **Image processing apparatus and control method thereof**

(57) There is provided an image processing apparatus for temporarily stopping reproduction of an accumulation image automatically when a display mode for displaying a broadcast image (image obtained from a broadcast wave) and the accumulation image (image obtained from a storage medium) is switched to a display mode for displaying only the broadcast image, and automatically resuming the reproduction of the accumulation image when the display mode for displaying only the broadcast image is switched to the display mode for displaying the broadcast image and the accumulation image.

play mode for displaying only the broadcast image, and automatically resuming the reproduction of the accumulation image when the display mode for displaying only the broadcast image is switched to the display mode for displaying the broadcast image and the accumulation image.

**FIG. 1**

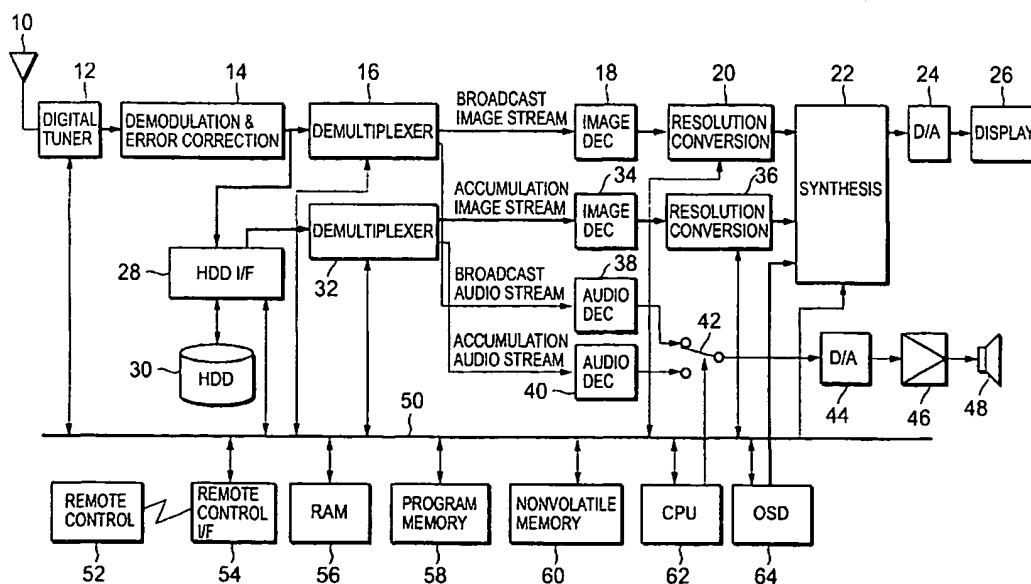

## Description

### BACKGROUND OF THE INVENTION

#### Field of the Invention

[0001] The present invention relates to an image processing apparatus having a display mode for displaying an image obtained from a broadcast wave and an image reproduced from a storage medium, and a control method thereof.

#### Related Background Art

[0002] Regarding conventional image processing apparatus, there has been known an apparatus having a display mode for displaying an image obtained from a broadcast wave (broadcast image, hereinafter) and an image reproduced from a storage medium (accumulation image, hereinafter) (see Japanese Patent Application Laid-Open No. 10-304287).

[0003] However, in the conventional image processing apparatus, when the display mode for displaying the broadcast image and the accumulation image is switched to a display mode for displaying only the broadcast image, the reproduction of the accumulation image cannot be stopped automatically or temporarily. Consequently, a user must instruct a stoppage or a temporary stoppage of the reproduction of the accumulation image after the display mode is switched, which makes an operation complex.

[0004] Additionally, in the conventional image processing apparatus, even if the reproduction of the accumulation image is temporarily stopped while the broadcast image and the accumulation image are displayed, a size of the broadcast image cannot be automatically increased. If the size of the broadcast image can be automatically increased, the broadcast image can be made easier to be viewed than the accumulation image. However, the conventional image processing apparatus has no such functions.

### SUMMARY OF THE INVENTION

[0005] A concern of the present invention is to overcome the above-described drawbacks.

[0006] Another concern of the present invention is to improve operability of an image processing apparatus having a display mode for displaying a broadcast image and an accumulation image.

[0007] According to one of the preferred embodiments of the present invention, there is provided an image processing apparatus having a first display mode for displaying a first image obtained from a broadcast wave and a second image reproduced from a storage medium on display means, and a second display mode for displaying the first image on the display means but not displaying the second image, the apparatus com-

prising: control means for stopping the reproduction of the second image when an instruction for switching the first display mode to the second display mode is detected.

5 [0008] According to one of the preferred embodiments of the present invention, there is provided a control method in an image processing apparatus having a first display mode for displaying a first image obtained from a broadcast wave and a second image reproduced from a storage medium on display means, and a second display mode for displaying the first image on the display means but not displaying the second image on the display means, the method comprising the steps of: detecting an instruction for switching the first display mode to the second display mode; and stopping the reproduction of the second image when the instruction is detected.

10 [0009] According to one of the preferred embodiments of the present invention, there is provided an image processing apparatus having a display mode for displaying a first image obtained from a broadcast wave and a second image reproduced from a storage medium on display means, the apparatus comprising: synthesizing means for not synthesizing the first image and the second image when an instruction for temporarily stopping the reproduction of the second image is detected while the first image and the second image are displayed on the display means.

15 [0010] According to one of the preferred embodiments of the present invention, there is provided a control method in an image processing apparatus having a display mode for displaying a first image obtained from a broadcast wave and a second image reproduced from a storage medium on display means, the method comprising the steps of: detecting an instruction for temporarily stopping the reproduction of the second image while the first image and the second image are displayed on the display means; and executing control not to synthesize the first image and the second image when the instruction is detected.

20 [0011] According to one of the preferred embodiments of the present invention, there is provided an image processing apparatus having a first display mode for displaying a first image obtained from a broadcast wave and a second image reproduced from a storage medium on display means, and a second display mode for displaying the second image on the display means but not displaying the first image, the apparatus comprising: determining means for determining whether an instruction for switching the first display mode to the second display mode is detected or not; and recording means for starting recording of the first image when the instruction is detected.

25 [0012] According to one of the preferred embodiments of the present invention, there is provided a control method in an image processing apparatus having a first display mode for displaying a first image obtained from a broadcast wave and a second image reproduced from a storage medium on display means, and a second

display mode for displaying the second image on the display means but not displaying the first image, the method comprising the steps of: determining whether an instruction for switching the first display mode to the second display mode is detected or not; and starting recording of the first image when the instruction is detected.

[0013] According to one of the preferred embodiments of the present invention, there is provided an image processing apparatus having a display mode for displaying a first image obtained from a broadcast wave and a second image reproduced from a storage medium on display means, the apparatus comprising: first image processing means for increasing a size of the first image when an instruction for temporarily stopping the reproduction of the second image is detected while the first image and the second image are displayed on the display means; and second image processing means for decreasing a size of the second image when the instruction for temporarily stopping the reproduction of the second image is detected while the first image and the second image are displayed on the display means.

[0014] According to one of the preferred embodiments of the present invention, there is provided a control method in an image processing apparatus having a display mode for displaying a first image obtained from a broadcast wave and a second image reproduced from a storage medium on display means, the method comprising the steps of: increasing a size of the first image when an instruction for temporarily stopping the reproduction of the second image is detected while the first image and the second image are displayed on the display means; and decreasing a size of the second image when an instruction for temporarily stopping the reproduction of the second image is detected while the first image and the second image are displayed on the display means.

[0015] Still other features and advantages of the present invention will become fully apparent from the following detailed description of the preferred embodiments.

#### BRIEF DESCRIPTION OF THE DRAWINGS

[0016]

FIG. 1 is a block diagram showing main components of an image processing apparatus of each embodiment.

FIG. 2 is a view showing a remote controller 52 and operation keys thereof.

FIG. 3 is a view showing an example of a menu screen for an HDD 30.

FIG. 4 is a flowchart showing a part of an operation process of an image processing apparatus of a first embodiment.

FIG. 5 is a flowchart showing a remaining part of the operation process of the image processing ap-

paratus of the first embodiment.

FIGS. 6A, 6B and 6C are views each showing an example of an image displayed on a display device 26 of FIG. 1.

FIG. 7 is a flowchart showing an operation process of an image processing apparatus of a second embodiment.

FIG. 8 is a flowchart showing an operation process of an image processing apparatus of a third embodiment.

FIG. 9 is a flowchart showing an operation process of an image processing apparatus of a fourth embodiment.

FIG. 10 is a flowchart showing an operation process of an image processing apparatus of a fifth embodiment.

FIG. 11 is a view showing an example of an image displayed on the display device 26 of FIG. 1.

#### DESCRIPTION OF THE PREFERRED EMBODIMENTS

[0017] Next, a plurality of embodiments of the present invention will be described in detail with reference to the accompanying drawings.

(First Embodiment)

[0018] FIG. 1 shows main components of a digital broadcast receiver which is an image processing apparatus of each embodiment of the present invention. The image processing apparatus receives a digital broadcast compliant with digital video broadcasting (DVB). Additionally, the image processing apparatus complies with an MPEG-2 system (reference: ISO/IEC 13818-1 International Standard MPEG-2 Systems), an MPEG-2 video (reference: ISO/IEC 13818-2 International Standard MPEG-2 Video) and an MPEG-2 audio (reference: ISO/IEC 13818-3 International Standard MPEG-2 Audio).

[0019] A central processing unit (CPU) 62 controls functions of the image processing apparatus in accordance with programs recorded in a program memory 58. The program memory 58 is a storage medium for recording programs to be executed by the CPU 62. A bus 50 connects the CPU 62 with other circuits. A random access memory (RAM) 56 is a work memory of the CPU 62. A nonvolatile memory 60 is a memory for recording a state of the image processing apparatus when a power supply is turned OFF.

[0020] An antenna 10 receives the digital broadcast compliant with the DVB. A digital tuner 12 receives a transport stream designated by the CPU 62. A demodulation & error correction unit 14 demodulates the transport stream obtained from the digital tuner 12 to correct its error.

[0021] A demultiplexer 16 separates an image stream (broadcast image stream, hereinafter) and an audio

stream (broadcast audio stream, hereinafter) from the transport stream obtained from the demodulation & error correction unit 14, and supplies the broadcast image stream to an image decoder 18 and the broadcast audio stream to the audio decoder 38.

[0022] The image decoder 18 decodes the broadcast image stream supplied from the demultiplexer 16 and generates the broadcast image. A resolution conversion unit 20 adjusts a resolution of the broadcast image obtained from the image decoder 18 to change a size of the broadcast image.

[0023] An HDD interface 28 records the transport stream obtained from the demodulation & error correction unit 14 in a hard disk drive (HDD) 30, and reproduces a transport stream designated by the CPU 62 from the HDD 30.

[0024] A demultiplexer 32 separates an image stream (accumulation image stream, hereinafter) and an audio stream (accumulation audio stream, hereinafter) from the transport stream obtained from the HDD interface 28, and supplies the accumulation image stream to an image decoder 34 and the accumulation audio stream to an audio decoder 40.

[0025] The image decoder 34 decodes the accumulation image stream obtained from the demultiplexer 32 and generates the accumulation image. A resolution conversion unit 36 adjusts a resolution of an accumulation image obtained from the image decoder 34 to change a size of the accumulation image.

[0026] A synthesis unit 22 outputs, in accordance with an instruction from the CPU 62, any one of the broadcast image obtained from the resolution conversion unit 20, the accumulation image obtained from the resolution conversion unit 34, and a synthetic image containing the broadcast image obtained from the resolution conversion unit 20 and the accumulation image obtained from the resolution conversion unit 34. Additionally, the synthesis unit 22 superposes, in accordance with an instruction from the CPU 62, display information obtained from an on-screen display (OSD) 64 on a part of the broadcast image, and display information obtained from the OSD 64 on a part of the accumulation image. A D/A converter 24 subjects the broadcast image, the accumulation image or the synthetic image outputted from the synthesis unit 22 to D/A conversion. A display device 26 displays the broadcast image, the accumulation image or the synthetic image obtained from the D/A converter 24.

[0027] The audio decoder 38 decodes the broadcast audio stream supplied from the demultiplexer 16 to generate a broadcast audio. The audio decoder 40 decodes the accumulation audio stream supplied from the demultiplexer 32 to generate an accumulation audio.

[0028] A switch 42 selects the audio decoder 38 or 40 in accordance with an instruction from the demultiplexer 16. A D/A converter 44 subjects the broadcast audio or the accumulation audio obtained from the switch 42 to D/A conversion. An amplifier 46 amplifies the broadcast

audio or the accumulation audio obtained from the D/A converter 44. A speaker 48 outputs the broadcast audio or the accumulation audio obtained from the amplifier 46.

5 [0029] A remote controller 52 remote-controls the image processing apparatus. A remote control interface 54 receives a remote control code outputted from the remote controller 52, and supplies the received remote control code to the CPU 62.

10 [0030] FIG. 2 shows the remote controller 52 and operation keys thereof.

[0031] A reference numeral 70 denotes a transmission unit. The transmission unit 70 outputs a corresponding remote control code when one of the keys 72 to 114 is pushed.

15 [0032] A reference numeral 72 denotes a power supply key, 84 an HDD menu key, 74 a determination key, 76 a right cursor key, 78 a lower cursor key, 80 a left cursor key, and 82 an upper cursor key.

20 [0033] Reference numerals 86 to 96 denote operation keys for controlling the HDD 30: 86 a fast-return key, 88 a reproduction key, 90 a fast-forward key, 92 a recording key, 94 a stop key, and 96 a pause key.

[0034] A reference numeral 104 denotes a channel selection key, and 106 a program table key. When pushing of the program table key 106 is detected, the CPU 62 displays an electronic program table (EPG) on the display device 26. A reference numeral 108 denotes a channel down key, and 110 a channel up key. A reference numeral 112 denotes a volume down key, and 114 a volume up key.

[0035] Reference numerals 98 to 102 denote window control keys: 100 a 2-window key for switching a display mode to a 2-window mode (display mode for displaying an accumulation image and a broadcast image on the display device 26), 98 a left window key, and 102 a right window key. When the left window key 98 is pushed on the 2-window mode, the left window becomes active and an audio corresponding to an image on the left window is outputted from the speaker 48. On the other hand, when the right window key 102 is pushed on the 2-window mode, the right window becomes active and an audio corresponding to an image on the right window is outputted from the speaker 48.

45 [0036] FIGS. 4 and 5 are flowcharts explaining an operation process of the image processing apparatus of a first embodiment.

[0037] Step S11: the CPU 62 determines whether a power supply is ON or not. If the power supply is ON, the process proceeds to step S12. In this case, the CPU 62 is set on a broadcast mode (display mode for displaying a broadcast image but not an accumulation image on the display device 26).

55 [0038] Step S12: the CPU 62 reads a channel number stored in the nonvolatile memory 60 (channel number written in the nonvolatile memory 60 by the CPU 62 when a power supply is turned OFF), and instructs the digital tuner 12 to receive a broadcast wave correspond-

ing to the channel number.

[0039] Step S13: the digital tuner 12 outputs a transport stream designated by the CPU 62. The demodulation & error correction unit 14 demodulates the transport stream obtained from the digital tuner 12 to correct its error.

[0040] Step S14: the demultiplexer 16 separates a broadcast image stream and a broadcast audio stream from the transport stream obtained from the demodulation and error correction unit 14, and supplies the broadcast image stream to the image decoder 18 and the broadcast audio stream to the audio decoder 38.

[0041] Step S15: the image decoder 18 starts decoding of the broadcast image stream, and the audio decoder 38 also starts decoding of the broadcast audio stream. The resolution conversion unit 20 adjusts a resolution of the broadcast image obtained from the image decoder 18 to match a size of the broadcast image with a screen size of the display device 26. The OSD 64 generates display information (e.g., "6ch") indicating a channel number of the broadcast image. The synthesis unit 22 superposes the display information obtained from the OSD 64 on a part of the broadcast image obtained from the resolution conversion unit 20, and supplies the broadcast image to the D/A converter 24. The switch 42 selects a broadcast audio obtained from the audio decoder, and supplies it to the D/A converter 44.

[0042] Step S16: the display device 26 displays a broadcast image obtained from the D/A converter 24. The speaker 48 outputs a broadcast audio obtained from the amplifier 46.

[0043] Step S17: the CPU 62 determines whether the HDD menu key 84 has been pushed or not. If the pushing of the HDD menu key 84 is detected, the CPU 62 starts control for the process from step S18 to step S23. In this case, the CPU 62 is set on an HDD mode from the broadcast mode (display mode for displaying an accumulation image but not a broadcast image on the display device 26).

[0044] Step S18: the CPU 62 causes the OSD 64 to generate a menu screen for the HDD 30, and display the menu screen on the display device 26. FIG. 3 shows an example of a menu screen displayed on the display device 26. According to the embodiment, as shown in FIG. 3, a title of an accumulation image recorded in the HDD 30 and a thumbnail image are displayed on the menu screen. A user uses the cursor keys 76 to 82 and the determination key 74 to select an accumulation image to be reproduced. A reference numeral 120 of FIG. 3 denotes the thumbnail image of an accumulation image selected by the user.

[0045] Step S20: the HDD interface 28 starts reproduction of a transport stream of the accumulation image selected by the user.

[0046] Step S21: the demultiplexer 32 separates an accumulation image stream and an accumulation audio stream from the transport stream obtained from the HDD interface 28, and supplies the accumulation image

stream to the image decoder 34 and the accumulation audio stream to the audio decoder 40.

[0047] Step S22: the image decoder 34 starts decoding of the accumulation image stream, and the audio decoder 40 also starts decoding of the accumulation audio stream. The resolution conversion unit 36 adjusts a resolution of the accumulation image obtained from the image decoder 34 to match a size of the accumulation image with a screen size of the display device 26. The OSD 64 generates display information (e.g., "HDD PLAY") indicating on-going reproduction of the accumulation image. The synthesis unit 22 superposes the display information obtained from the OSD 64 on a part of the accumulation image obtained from the resolution conversion unit 36, and supplies the accumulation image to the D/A converter 24. The switch 42 selects an accumulation audio obtained from the audio decoder 40, and supplies it to the D/A converter 44.

[0048] Step S23: the display device 26 displays an accumulation image obtained from the D/A converter 24. The speaker 48 outputs an accumulation audio obtained from the amplifier 46.

[0049] Step S24: the CPU 62 determines whether the 2-window key 100 has been pushed or not. If the pushing of the 2-window key 100 is detected, the CPU 62 starts control for the process from step S25 to step S26. In this case, the CPU 62 is set on a 2-window mode from the HDD mode (display mode for displaying a broadcast image and an accumulation image on the display device 26). Additionally, the CPU 62 makes a window (left window) that displays the accumulation image active.

[0050] Step S25: the resolution conversion unit 20 adjusts a resolution of the broadcast image obtained from the image decoder 18 (image of a channel last seen by the user) to set a size of the broadcast image to a size of about 1/4 of a screen size of the display device 26. The OSD 64 generates display information (e.g., "6ch") indicating a channel number of the broadcast image. The synthesis unit 22 superposes the display information obtained from the OSD 64 on a part of the broadcast image obtained from the resolution conversion unit 20. On the other hand, the resolution conversion unit 36 adjusts a resolution of the accumulation image obtained from the image decoder 34 to set a size of the accumulation image to a size of about 1/4 of a screen size of the display device 26. The OSD 64 generates display information (e.g., "HDD PLAY") indicating on-going reproduction of the accumulation image. The synthesis unit 22 superposes the display information obtained from the OSD 64 on a part of the accumulation image obtained from the resolution conversion unit 36.

[0051] Step S26: the synthesis unit 22 generates a synthetic image containing the broadcast image obtained from the resolution conversion unit 20 and the accumulation image obtained from the resolution conversion unit 36. The D/A converter 24 subjects the synthetic image obtained from the synthetic unit 24 to D/A conversion. The display device 26 displays the synthetic

image obtained from the D/A converter 24. An example of an image displayed on the display device 26 at this time is shown in FIG. 6A. In FIG. 6A, a reference numeral 130 denotes a screen of the display device 26, 132 an accumulation image, and 134 a broadcast image. Additionally at this time, an accumulation audio is outputted from the speaker 48. In order to switch the audio outputted from the speaker 48 to a broadcast audio, the user only needs to push the right window key 102 (because the broadcast image is displayed on the right of the screen).

[0052] Step S27: the CPU 62 determines whether the right window key 102 has been pushed or not. If the pushing of the right window key 102 is detected, the CPU 62 makes the right window active, and starts control for the process of step S28.

[0053] Step S28: the switch 42 selects the broadcast audio obtained from the audio decoder 38, and supplies it to the D/A converter 44. The speaker 48 outputs the accumulation audio obtained from the amplifier 46. At this time, in order to raise a volume of the broadcast audio, the user only needs to push the volume up key 114. In order to lower the volume of the broadcast audio, the user only needs to push the volume down key 112. If the user wishes to display a broadcast image of another channel on the right window, the user only needs to push the channel down key 108 or the channel up key 110.

[0054] Step S30: the CPU 62 determines whether the 2-window key 100 has been pushed or not. If the pushing of the 2-window key 100 is detected, the CPU 62 starts control for the process from step S31 to step S32. In this case, the CPU 62 is set on a broadcast mode from the 2-window mode because the right window displaying the broadcast image is active.

[0055] Step S31: the HDD interface 28 temporarily stops the reproduction of the transport stream automatically. The switch 42 selects a broadcast audio obtained from the audio decoder 38, and supplies it to the D/A converter 44. The speaker 48 outputs the broadcast audio obtained from the amplifier 46.

[0056] Step S32: the resolution conversion unit 20 adjusts a resolution of the broadcast image obtained from the image decoder 18 to match a size of the broadcast image with a screen size of the display device 26. The OSD 64 generates display information (e.g., "6ch") indicating a channel number of the broadcast image. The synthesis unit 22 synthesizes the display information obtained from the OSD 64 and the broadcast image obtained from the resolution conversion unit 20. Additionally, the synthesis unit 22 does not synthesize the broadcast image and the accumulation image whose reproduction has been temporarily stopped, and supplies only the broadcast image to the D/A converter 24. The D/A converter 24 subjects the broadcast image obtained from the synthesis unit 22 to D/A conversion. The display device 26 displays the broadcast image obtained from the D/A converter 24. FIG. 6B shows an example

of an image displayed by the display device 26 at this time. In FIG. 6B, a reference numeral 130 denotes a screen of the display device 26, and 134 a broadcast image. As shown in FIG. 6B, as the broadcast image can be displayed on the entire screen, the broadcast image can be made easier to be viewed.

[0057] Step S33: the CPU 62 determines whether the 2-window key 100 has been pushed or not. If the pushing of the 2-window key 100 is detected, the CPU 62 starts control for the process from step S31 to step S32. In this case, the CPU 62 returns to the 2-window mode from the broadcast mode.

[0058] Step S34: the HDD interface 28 automatically resumes the reproduction of the transport stream from the part temporarily stopped in step S31.

[0059] Step S35: the resolution conversion unit 20 adjusts a resolution of the broadcast image obtained from the image decoder 18 to set a size of the broadcast image to a size of about 1/4 of a screen size of the display device 26. The OSD 64 generates display information (e.g., "6ch") indicating a channel number of the broadcast image. The synthesis unit 22 superposes the display information obtained from the OSD 64 on a part of the broadcast image obtained from the resolution conversion unit 20. On the other hand, the resolution conversion unit 36 adjusts a resolution of the accumulation image obtained from the image decoder 34 to set a size of the accumulation image to a size of about 1/4 of a screen size of the display device 26. The OSD 64 generates display information (e.g., "HDD PLAY") indicating on-going reproduction of the accumulation image. The synthesis unit 22 superposes the display information obtained from the OSD 64 on a part of the accumulation image obtained from the resolution conversion unit 36.

[0060] Step S36: the synthesis unit 22 generates a synthetic image containing the broadcast image obtained from the resolution conversion unit 20 and the accumulation image obtained from the resolution conversion unit 36. The D/A converter 24 subjects the synthetic image obtained from the synthesis unit 22 to D/A conversion. The display device 26 displays the synthetic image obtained from the D/A converter 24. FIG. 6C shows an example of an image displayed by the display device 26 at this time. In FIG. 6C, a reference numeral 130 denotes a screen of the display device 26, 132 an accumulation image, and 134 a broadcast image. Additionally at this time, in order to switch an audio outputted from the speaker 48 to an accumulation audio, the user only needs to push the left window key 98 (because the accumulation image is displayed on the left of the screen).

[0061] As discussed above, according to the image processing apparatus of the first embodiment, when the 2-window mode (display mode for displaying the synthetic image containing the broadcast image and the accumulation image on the display device 26) is switched to the broadcast mode (display mode for displaying only the broadcast image on the display device 26), the re-

production of the accumulation image and the accumulation audio can be temporarily stopped automatically. Thus, it is possible to omit time and labor for instructing the image processing apparatus to temporarily stop the reproduction, whereby convenience is provided.

**[0062]** According to the image processing apparatus of the first embodiment, when the display mode for displaying only the broadcast image is switched back to the display mode for displaying the synthetic image containing the broadcast image and the accumulation image, the reproduction of the accumulation image and the accumulation audio can be automatically resumed from the temporarily stopped part. Thus, it is possible to omit time and labor for instructing the image processing apparatus to resume the reproduction.

**[0063]** The aforementioned functions of the first embodiment can also be realized by programs to be executed by the CPU 62 of FIG. 1.

**[0064]** Furthermore, the image processing apparatus shown in FIG. 1 uses the hard disk drive. However, the apparatus can also be realized by using a storage medium such as a tape drive or a magneto-optical disk.

#### (Second Embodiment)

**[0065]** FIG. 7 is a flowchart explaining an operation process of the image processing apparatus of a second embodiment. The image processing apparatus of the second embodiment is similar in constitution and functions to the image processing apparatus of the first embodiment, and thus detailed description thereof will be omitted. Additionally, the process from step S11 to step S22 of FIG. 4, and the process from step S23 to step S26 of FIG. 5 are also similar to those of the first embodiment, and thus detailed description will be omitted.

**[0066]** Step S41: after the process of step S26, the CPU 62 determines whether the pause key 96 has been pushed or not. If the pushing of the pause key 96 is detected (i.e., instruction to request a temporary stoppage of the reproduction of the accumulation image and the accumulation audio is detected), the CPU 62 starts control for the process from step S42 to step S43.

**[0067]** Step S42: the HDD interface 28 temporarily stops the reproduction of the transport stream automatically. The switch 42 selects a broadcast audio obtained from the audio decoder 38, and supplies it to the D/A converter 44. The speaker 48 automatically starts outputting of the broadcast audio obtained from the amplifier 46.

**[0068]** Step S43: the resolution conversion unit 20 adjusts a resolution of the broadcast image obtained from the image decoder 18 to match a size of the broadcast image with a screen size of the display device 26. The OSD 64 generates display information (e.g., "6ch") indicating a channel number of the broadcast image. The synthesis unit 22 superposes the display information obtained from the OSD 64 on a part of the broadcast image obtained from the resolution conversion unit 20. At this

time, the synthesis unit 22 can also synthesize display information (icon or the like) indicating a temporary stoppage of the reproduction of the accumulation image with the broadcast image. Additionally, the synthesis unit 22 does not synthesize the broadcast image and the accumulation image whose reproduction has been temporarily stopped, and supplies only the broadcast image to the D/A converter 24. The D/A converter 24 subjects the broadcast image obtained from the synthesis unit 22 to D/A conversion. The display device 26 displays the broadcast image obtained from the D/A converter 24. FIG. 6B shows an example of an image displayed by the display device 26 at this time. In FIG. 6B, a reference numeral 130 denotes a screen of the display device 26, and 134 a broadcast image. As shown in FIG. 6B, as the broadcast image can be displayed on the entire screen, the broadcast image can be made easier to be viewed.

**[0069]** Step S44: the CPU 62 determines whether the reproduction key 88 or the pause key 96 has been pushed or not. If the pushing of the reproduction key 88 or the pause key 96 is detected (i.e., instruction to request resumption of the reproduction of the accumulation image and the accumulation audio is detected), the CPU 62 starts control for the process from step S45 to step S47.

**[0070]** Step S45: the HDD interface 28 automatically resumes the reproduction of the transport stream from the part temporarily stopped in step S42. The switch 42 selects an accumulation audio obtained from the audio decoder 40, and supplies it to the D/A converter 44. The speaker 48 automatically starts outputting of the accumulation audio obtained from the amplifier 46.

**[0071]** Step S46: the resolution conversion unit 20 adjusts a resolution of the broadcast image obtained from the image decoder 18 to set a size of the broadcast image to a size of about 1/4 of a screen size of the display device 26. The OSD 64 generates display information (e.g., "6ch") indicating a channel number of the broadcast image. The synthesis unit 22 superposes the display information obtained from the OSD 64 on a part of the broadcast image obtained from the resolution conversion unit 20. On the other hand, the resolution conversion unit 36 adjusts a resolution of the accumulation image obtained from the image decoder 34 to set a size of the accumulation image to a size of about 1/4 of a screen size of the display device 26. The OSD 64 generates display information (e.g., "HDD PLAY") indicating on-going reproduction of the accumulation image. The synthesis unit 22 superposes the display information obtained from the OSD 64 on a part of the accumulation image obtained from the resolution conversion unit 36.

**[0072]** Step S47: the synthesis unit 22 generates a synthetic image containing the broadcast image obtained from the resolution conversion unit 20 and the accumulation image obtained from the resolution conversion unit 36. The D/A converter 24 subjects the synthetic image obtained from the synthesis unit 22 to D/A

conversion. The display device 26 displays the synthetic image obtained from the D/A converter 24. FIG. 6C shows an example of an image displayed by the display device 26 at this time. In FIG. 6C, a reference numeral 130 denotes a screen of the display device 26, 132 an accumulation image, and 134 a broadcast image. Additionally at this time, an accumulation audio is outputted from the speaker 48. In order to switch the audio outputted from the speaker 48 to a broadcast audio, the user only needs to push the right window key 102 (because the broadcast image is displayed on the right of the screen).

[0073] As discussed above, according to the image processing apparatus of the second embodiment, when the instruction to temporarily stop the reproduction of the accumulation image is detected while the broadcast image and the accumulation image are displayed on the display device 26, the displaying of the accumulation image whose reproduction has been temporarily stopped can be automatically stopped, and the size of the broadcast image can be automatically increased. Thus, the broadcast image can be made easier to be viewed. Moreover, in this case, when the instruction to resume the reproduction of the accumulation image is detected, the sizes of the accumulation image and the broadcast image can be automatically restored to original sizes, and outputting of the accumulation audio can be automatically started.

[0074] Incidentally, the aforementioned functions of the second embodiment can use the functions of the first embodiment. In other words, the image processing process of the second embodiment may be executed by the functions of the first embodiment.

[0075] Additionally, the aforementioned functions of the second embodiment can also be realized by programs to be executed by the CPU 62 of FIG. 1.

#### (Third Embodiment)

[0076] FIG. 8 is a flowchart explaining an operation process of the image processing apparatus of a third embodiment. The third embodiment explained herein is a partial modification of the first embodiment. Specifically, the process of step S34 of FIG. 5 is replaced by the process of step S51 of FIG. 8. The process from step S11 to step S22 of FIG. 4, the process from step S23 to step S26 of FIG. 5, and the process from step S35 to step S36 of FIG. 5 are similar to those of the first embodiment, and thus detailed description will be omitted.

[0077] Step S51: the HDD interface 28 resumes the reproduction of the transport stream a little before the part temporarily stopped in step S32 (e.g., 3 seconds before).

[0078] As discussed above, according to the image processing apparatus of the third embodiment, since the reproduction of the transport stream can be resumed before a predetermined time (e.g., 3 seconds before), it is possible to prevent overlooking of the accumulation

image immediately after the resumption.

[0079] Incidentally, the aforementioned functions of the third embodiment can be applied not only to the image apparatus of the first embodiment but also to the image apparatus of the second and fifth embodiments.

[0080] Additionally, the aforementioned functions of the third embodiment can also be realized by programs to be executed by the CPU 62 of FIG. 1.

#### 10 (Fourth Embodiment)

[0081] FIG. 9 is a flowchart explaining an operation process of the image processing apparatus of a fourth embodiment. The image processing apparatus of the fourth embodiment explained herein is a partial modification of the image processing apparatus of the first embodiment. The image processing apparatus of the fourth embodiment is similar in constitution and functions to the image processing apparatus of the first embodiment, and thus detailed description thereof will be omitted. In the fourth embodiment described herein, the process from step S27 to step S36 of FIG. 5 is replaced by the process from step S61 to S66 of FIG. 9. Additionally, the process from step S11 to step S22 of FIG. 4, and the process from step S23 to S26 of FIG. 5 are also similar to those of the first embodiment, and thus detailed description will be omitted.

[0082] Step S61: after the process of step S26, the CPU 62 determines whether the volume up key 114 has been pushed or not. If the pushing of the volume up key 114 is detected, the CPU 62 starts control for the process of step S62.

[0083] Step S62: the amplifier 46 raises a volume of the accumulation audio. The speaker 48 outputs the accumulation audio obtained from the amplifier 46.

[0084] Step S63: the CPU 62 determines whether the 2-window key 100 has been pushed or not. If the pushing of the 2-window key 100 is detected, the CPU 62 starts control for the process from step S64 to step S66.

[0085] Step S64: the HDD interface 28 automatically starts a process for recording the transport stream obtained from the demodulation & error correction unit 14 in the HDD 30. In other words, the recording of the transport stream under reception is automatically started.

[0086] Step S65: the HDD interface 28 continues the recording of the transport stream under reception until a start of a next program in accordance with an instruction from the CPU 62.

[0087] Step S66: the resolution conversion unit 36 adjusts a resolution of the accumulation image obtained from the image decoder 34 to match a size of the accumulation image with a screen size of the display device 26. The OSD 64 generates display information (e.g., "HDD PLAY") indicating on-going reproduction of the accumulation image. The synthesis unit 22 superposes the display information obtained from the OSD 64 on a part of the accumulation image obtained from the resolution conversion unit 36. At this time, the synthesis unit



22 can also superpose display information (icon or the like) indicating on-going recording of the broadcast image on a part of the accumulation image. Additionally, the synthesis unit 22 does not synthesize the accumulation image and the broadcast image which is currently recorded, and supplies only the accumulation image to the D/A converter 24. The D/A converter 24 subjects the accumulation image obtained from the synthesis unit 22 to D/A conversion. The display device 26 displays the accumulation image obtained from the D/A converter 24.

[0088] As discussed above, according to the image processing apparatus of the fourth embodiment, when the 2-window mode (display mode for displaying the synthetic image containing the broadcast image and the accumulation image on the display device 26) is switched to the HDD mode (display mode for displaying only the accumulation image on the display device 26), the recording of the broadcast image and the broadcast audio can be automatically started. Thus, sequels of the broadcast image and the broadcast audio can be conveniently viewed and listened to after the viewing and listening of the accumulation image and the accumulation audio.

[0089] Incidentally, the aforementioned functions of the fourth embodiment can be applied not only to the image processing apparatus of the first embodiment but also to the image processing apparatus of the second and fifth embodiments.

[0090] Additionally, the aforementioned functions of the fourth embodiment can also be realized by programs to be executed by the CPU 62 of FIG. 1.

#### (Fifth Embodiment)

[0091] FIG. 10 is a flowchart explaining an operation process of the image processing apparatus of the fifth embodiment. The image processing apparatus of the fifth embodiment is similar in constitution and functions to the image processing apparatus of the first embodiment, and thus detailed description thereof will be omitted. Additionally, the process from step S11 to step S22 of FIG. 4, and the process from step S23 to step S26 of FIG. 5 are also similar to those of the first embodiment, and thus detailed description will be omitted.

[0092] Step S101: after the process of step S26, the CPU 62 determines whether the pause key 96 has been pushed or not. If the pushing of the pause key 96 is detected (i.e., instruction to request a temporary stoppage of the reproduction of the accumulation image and the accumulation audio is detected), the CPU 62 starts control for the process from step S102 to step S104.

[0093] Step S102: the HDD interface 28 temporarily stops the reproduction of the transport stream automatically. The switch 42 selects a broadcast audio obtained from the audio decoder 38, and supplies it to the D/A converter 44. The speaker 48 automatically starts outputting of the broadcast audio obtained from the ampli-

fier 46.

[0094] Step S103: the resolution conversion unit 36 changes a resolution of an accumulation image whose reproduction has been temporarily stopped (pause image, hereinafter) to match a size of the pause image with a screen size of the display device 26. The OSD 64 generates display information (HDD PAUSE) indicating a temporary stoppage of the reproduction of the accumulation image. The synthesis unit 22 superposes the display information obtained from the OSD 64 on a part of the pause image obtained from the resolution conversion unit 36. On the other hand, the resolution conversion unit 20 adjusts a resolution of the broadcast image obtained from the image decoder 18 to set a size of the broadcast image to a size of about 1/2 of a screen size of the display device 26. The OSD 64 generates display information (e.g., "6ch") indicating a channel number of the broadcast image.

[0095] Step S104: the synthesis unit 22 generates a synthetic image containing the broadcast image obtained from the resolution conversion unit 20 and the pause image obtained from the resolution conversion unit 36. The D/A converter 24 subjects the synthetic image obtained from the synthesis unit 22 to D/A conversion. The display device 26 displays the synthetic image obtained from the D/A converter 24. FIG. 11 shows an example of a synthetic image displayed by the display device 26 at this time. In FIG. 11, a reference numeral 130 denotes a screen of the display device 26, 132 a pause image, and 134 a broadcast image. As shown in FIG. 11, as the accumulation image whose reproduction has been temporarily stopped can be displayed small while the broadcast image can be displayed large, the broadcast image can be made easier to be viewed, and the temporarily stopped position of the accumulation image can be notified to the user.

[0096] Step S105: the CPU 62 determines whether the reproduction key 88 or the pause key 96 has been pushed or not. If the pushing of the reproduction key 88 or the pause key 96 is detected (i.e., instruction to request resumption of the reproduction of the accumulation image and the accumulation audio is detected), the CPU 62 starts control for the process from step S106 to step S108.

[0097] Step S106: the HDD interface 28 automatically resumes the reproduction of the transport stream from the part temporarily stopped in step S102. The demultiplexer 32 separates the accumulation image stream from the transport stream obtained from the HDD interface 28, and supplies it to the image decoder 34. Additionally, the demultiplexer 32 separates the accumulation audio stream from the transport stream obtained from the HDD interface 28, and supplies it to the audio decoder 40. The image decoder 34 starts decoding of the accumulation image stream, and the audio decoder 40 also starts decoding of the accumulation audio stream. The switch 42 selects an accumulation audio obtained from the audio decoder 40, and supplies it to

the D/A converter 44. The speaker 48 automatically starts outputting of the accumulation audio obtained from the amplifier 46.

[0098] Step S107: the resolution conversion unit 20 adjusts a resolution of the broadcast image obtained from the image decoder 18 to set a size of the broadcast image to a size of about 1/4 of a screen size of the display device 26. The OSD 64 generates display information (e.g., "6ch") indicating a channel number of the broadcast image. The synthesis unit 22 superposes the display information obtained from the OSD 64 on a part of the broadcast image obtained from the resolution conversion unit 20. On the other hand, the resolution conversion unit 36 adjusts a resolution of the accumulation image obtained from the image decoder 34 to set a size of the accumulation image to a size of about 1/4 of a screen size of the display device 26. The OSD 64 generates display information (e.g., "HDD PLAY") indicating on-going reproduction of the accumulation image. The synthesis unit 22 superposes the display information obtained from the OSD 64 on a part of the accumulation image obtained from the resolution conversion unit 36.

[0099] Step S108: the synthesis unit 22 generates a synthetic image containing the broadcast image obtained from the resolution conversion unit 20 and the accumulation image obtained from the resolution conversion unit 36. The D/A converter 24 subjects the synthetic image obtained from the synthesis unit 22 to D/A conversion. The display device 26 displays the synthetic image obtained from the D/A converter 24. FIG. 6C shows an example of a synthetic image displayed by the display device 26 at this time. In FIG. 6C, a reference numeral 130 denotes a screen of the display device 26, 132 an accumulation image, and 134 a broadcast image. Additionally at this time, an accumulation audio is outputted from the speaker 48. In order to switch the audio outputted from the speaker 48 to a broadcast audio, the user only needs to push the right window key 102 (because the broadcast image is displayed on the right of the screen).

[0100] As discussed above, according to the image processing apparatus of the fifth embodiment, when the instruction to temporarily stop the reproduction of the accumulation image is detected while the synthetic image containing the broadcast image and the accumulation image is displayed on the display device 26, the size of the accumulation image whose reproduction has been temporarily stopped can be decreased while the size of the broadcast image can be increased. Thus, the broadcast image can be made easier to be viewed, and the temporarily stopped part of the reproduction of the accumulation image can be notified to the user. Moreover, in this case, when the instruction to resume the reproduction of the accumulation image is detected, the sizes of the accumulation image and the broadcast image can be automatically restored to original sizes, and outputting of the accumulation audio can be automati-

cally started.

[0101] It is to be noted that the aforementioned functions of the second embodiment can also be realized by programs to be executed by the CPU 62 of FIG. 1.

[0102] The above-described preferred embodiments are merely exemplary of the present invention, and are not be construed to limit the scope of the present invention.

[0103] The scope of the present invention is defined by the scope of the appended claims, and is not limited to only the specific descriptions in this specification. Furthermore, all modifications and changes belonging to equivalents of the claims are considered to fall within the scope of the present invention.

## Claims

1. An image processing apparatus having a first display mode for displaying a first image obtained from a broadcast wave and a second image reproduced from a storage medium on display means, and a second display mode for displaying the first image on the display means but not displaying the second image, the apparatus comprising:

control means for stopping a reproduction of the second image when an instruction for switching the first display mode to the second display mode is detected.

2. The image processing apparatus according to claim 1, wherein the control means resumes the reproduction of the second image when an instruction for switching the second display mode to the first display mode is detected.

3. The image processing apparatus according to claim 2, wherein the control means resumes the reproduction of the second image before a predetermined time when a reproduction of the first image is resumed.

4. A control method in an image processing apparatus having a first display mode for displaying a first image obtained from a broadcast wave and a second image reproduced from a storage medium on display means, and a second display mode for displaying the first image on the display means but not displaying the second image on the display means, the method comprising the steps of:

detecting an instruction for switching the first display mode to the second display mode; and stopping a reproduction of the second image when the instruction is detected.

5. The control method according to claim 4, further

comprising a step of resuming the reproduction of the second image when an instruction for switching the second display mode to the first display mode is detected.

6. The control method according to claim 5, further comprising a step of resuming the reproduction of the second image before a predetermined time when the reproduction of the first image is resumed.

7. An image processing apparatus having a display mode for displaying a first image obtained from a broadcast wave and a second image reproduced from a storage medium on display means, the apparatus comprising:

synthesizing means for not synthesizing the first image and the second image when an instruction for temporarily stopping a reproduction of the second image is detected while the first image and the second image are displayed on the display means.

8. The image processing apparatus according to claim 7, wherein the synthesizing means synthesizes the first image and the second image when an instruction for resuming the reproduction of the second image is detected while the first image and the second image are displayed on the display means.

9. The image processing apparatus according to claim 8, wherein the image processing apparatus resumes the reproduction of the second image before a predetermined time when the reproduction of the second image is resumed.

10. A control method in an image processing apparatus having a display mode for displaying a first image obtained from a broadcast wave and a second image reproduced from a storage medium on display means, the method comprising the steps of:

detecting an instruction for temporarily stopping the reproduction of the second image while the first image and the second image are displayed on the display means; and  
executing control not to synthesize the first image and the second image when the instruction is detected.

11. The control method according to claim 10, further comprising a step of synthesizing the first image and the second image when the instruction for resuming the reproduction of the second image is detected while the first image and the second image are displayed on the display means.

12. The control method according to claim 11, further

comprising a step of resuming the reproduction of the second image before a predetermined time when the reproduction of the second image is resumed.

13. An image processing apparatus having a first display mode for displaying a first image obtained from a broadcast wave and a second image reproduced from a storage medium on display means, and a second display mode for displaying the second image on the display means but not displaying the first image, the apparatus comprising:

determining means for determining whether an instruction for switching the first display mode to the second display mode is detected or not; and  
recording means for starting recording of the first image when the instruction is detected.

14. A control method in an image processing apparatus having a first display mode for displaying a first image obtained from a broadcast wave and a second image reproduced from a storage medium on display means, and a second display mode for displaying the second image on the display means but not displaying the first image, the method comprising the steps of:

determining whether an instruction for switching the first display mode to the second display mode is detected or not; and  
starting recording of the first image when the instruction is detected.

15. An image processing apparatus having a display mode for displaying a first image obtained from a broadcast wave and a second image reproduced from a storage medium on display means, the apparatus comprising:

first image processing means for increasing a size of the first image when an instruction for temporarily stopping a reproduction of the second image is detected while the first image and the second image are displayed on the display means; and  
second image processing means for decreasing a size of the second image when the instruction for temporarily stopping the reproduction of the second image is detected while the first image and the second image are displayed on the display means.

16. The image processing apparatus according to claim 15, wherein the first image processing means decreases the size of the first image when an instruction for resuming the reproduction of the second im-

age is detected while the first image and the second image are displayed on the display means; and the second image processing means increases the size of the second image when an instruction for resuming the reproduction of the second image is detected while the first image and the second image are displayed on the display means. 5

17. The image processing apparatus according to claim 16, wherein the image processing apparatus resumes the reproduction of the second image before a predetermined time when the reproduction of the second image is resumed. 10

18. A control method in an image processing apparatus having a display mode for displaying a first image obtained from a broadcast wave and a second image reproduced from a storage medium on display means, the method comprising the steps of: 15

increasing a size of the first image when an instruction for temporarily stopping a reproduction of the second image is detected while the first image and the second image are displayed on the display means; and 20  
decreasing a size of the second image when an instruction for temporarily stopping the reproduction of the second image is detected while the first image and the second image are displayed on the display means. 25  
30

19. The control method according to claim 18, further comprising a step of decreasing the size of the first image when an instruction for resuming the reproduction of the second image is detected while the first image and the second image are displayed on the display means; and a step of increasing the size of the second image when an instruction for resuming the reproduction of the second image is detected while the first image and the second image are displayed on the display means. 35  
40

20. The control method according to claim 19, further comprising a step of resuming the reproduction of the second image before a predetermined time when the reproduction of the second image is resumed. 45

50

55

FIG. 1

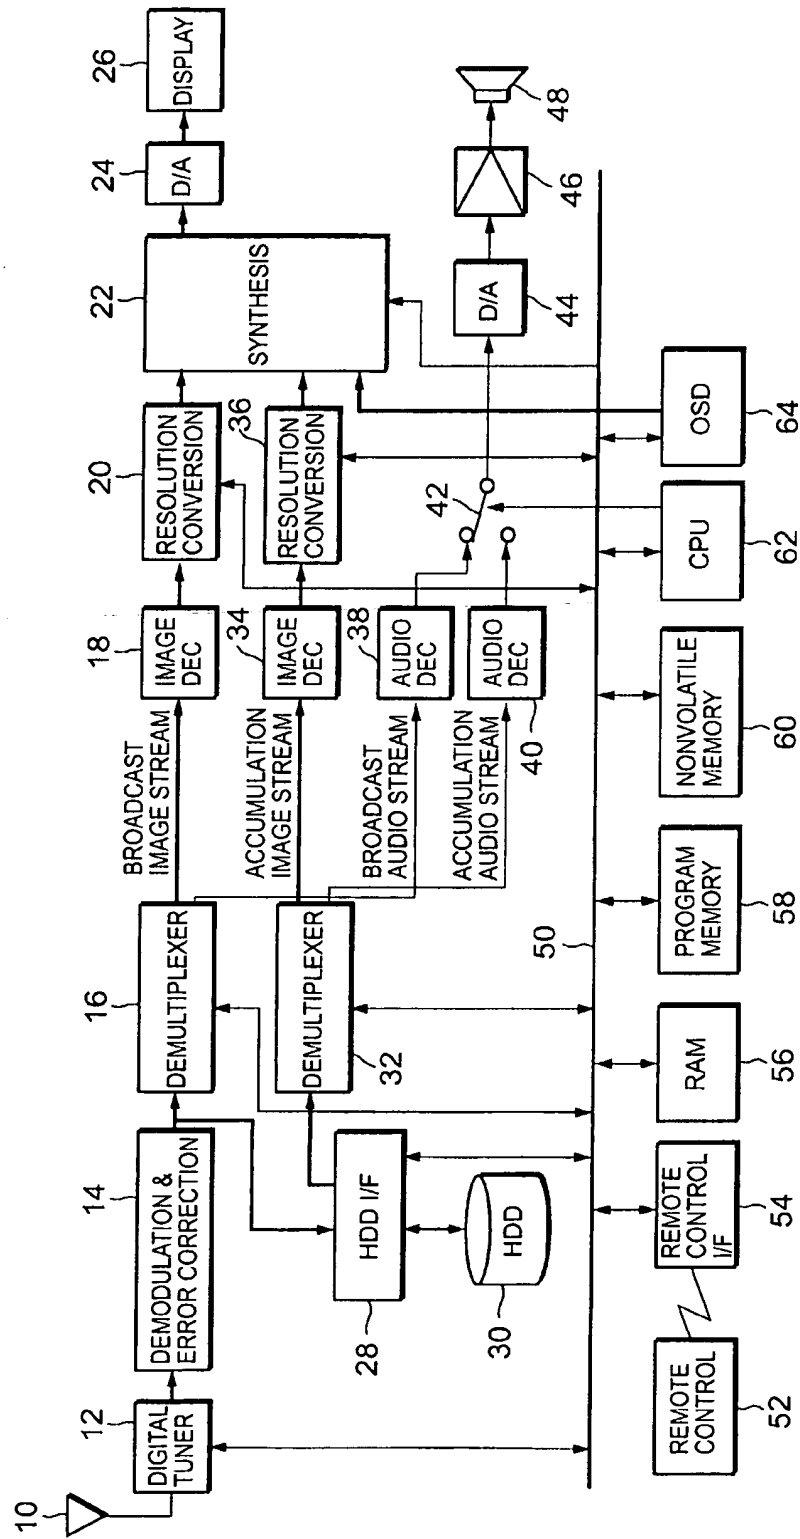


FIG. 2

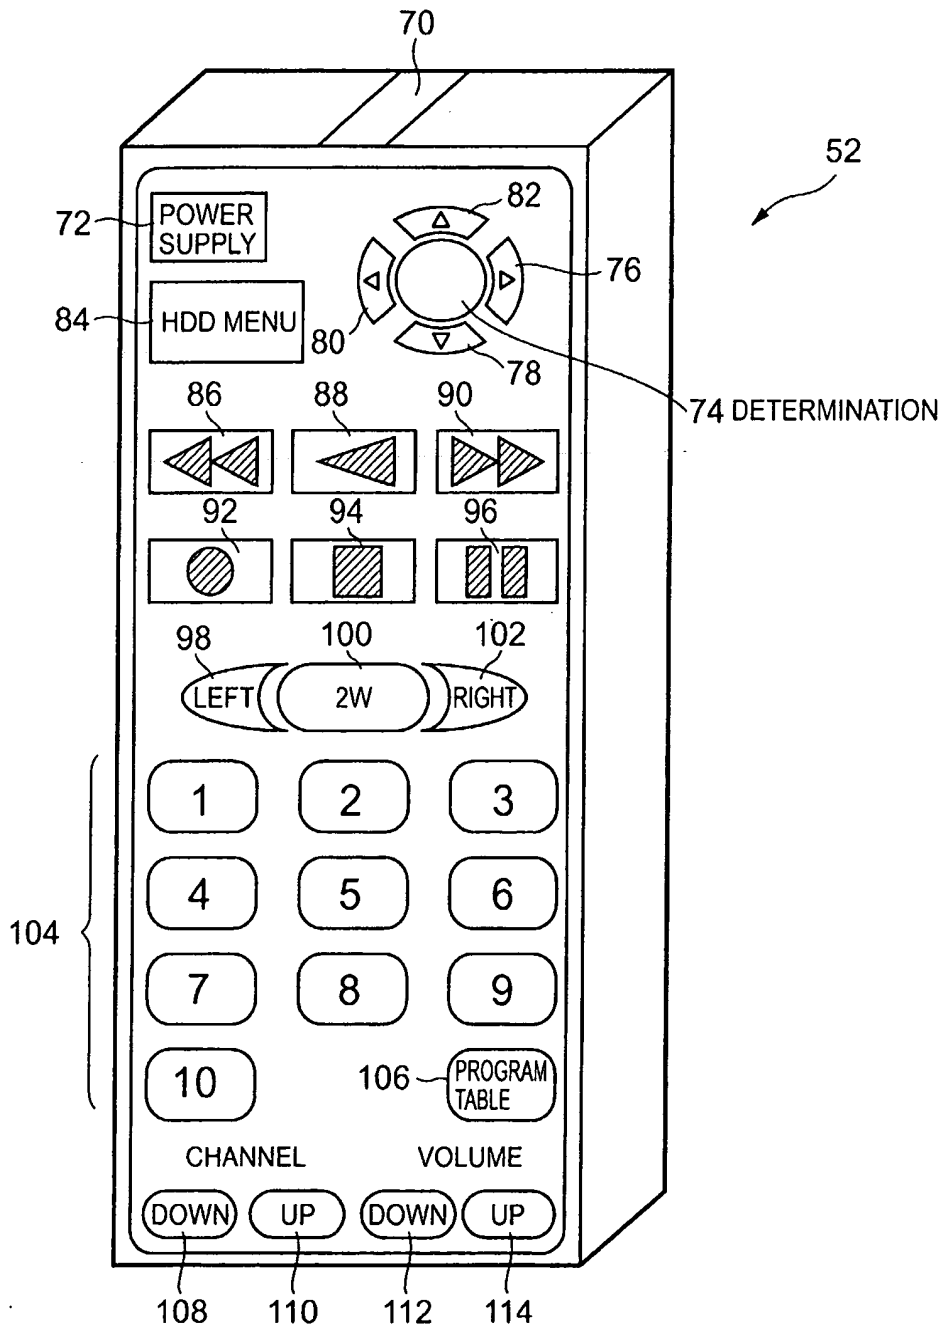


FIG. 3

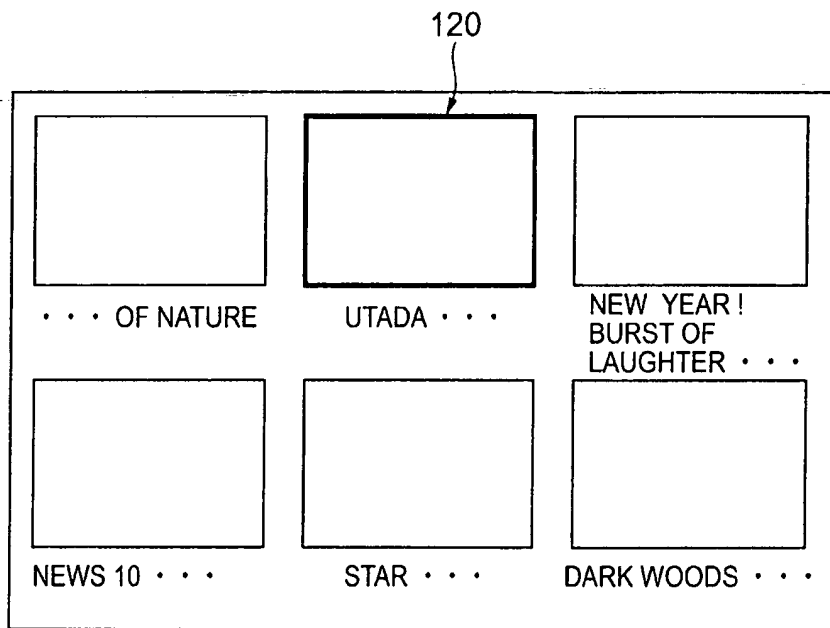


FIG. 4

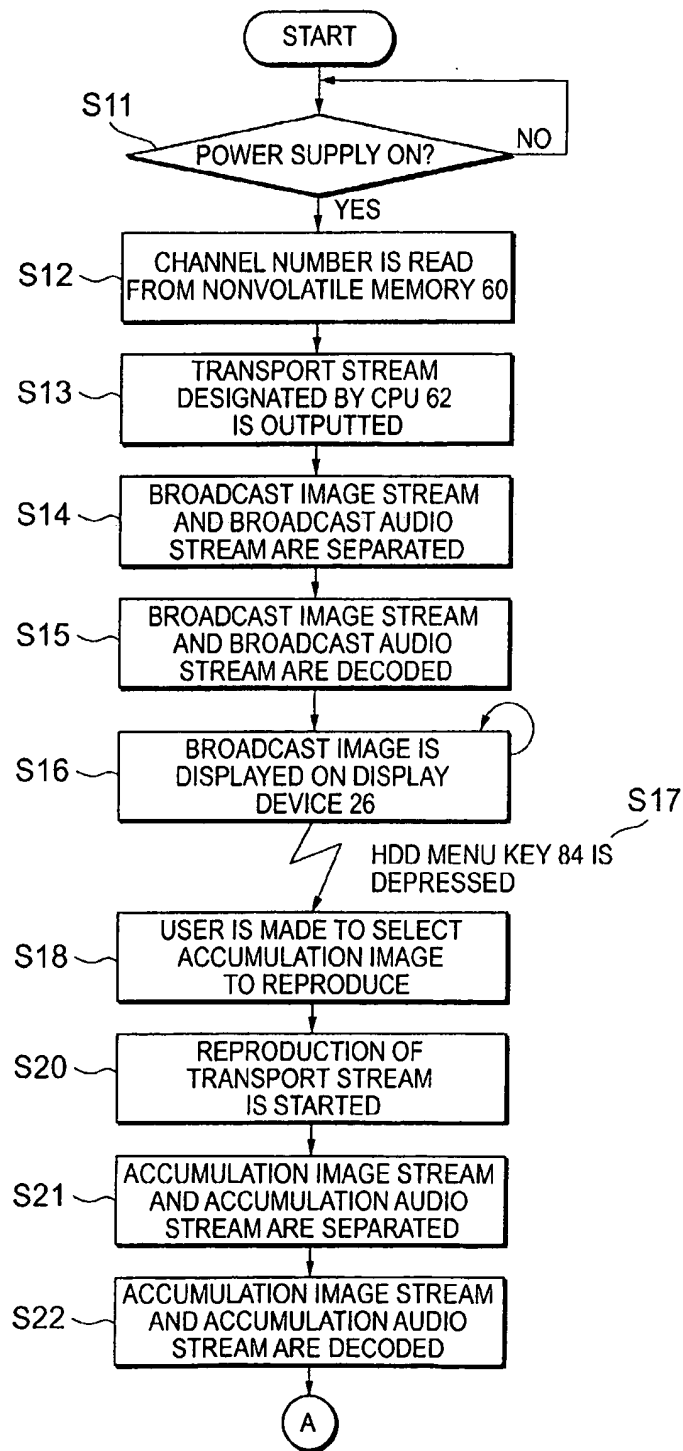




FIG. 5





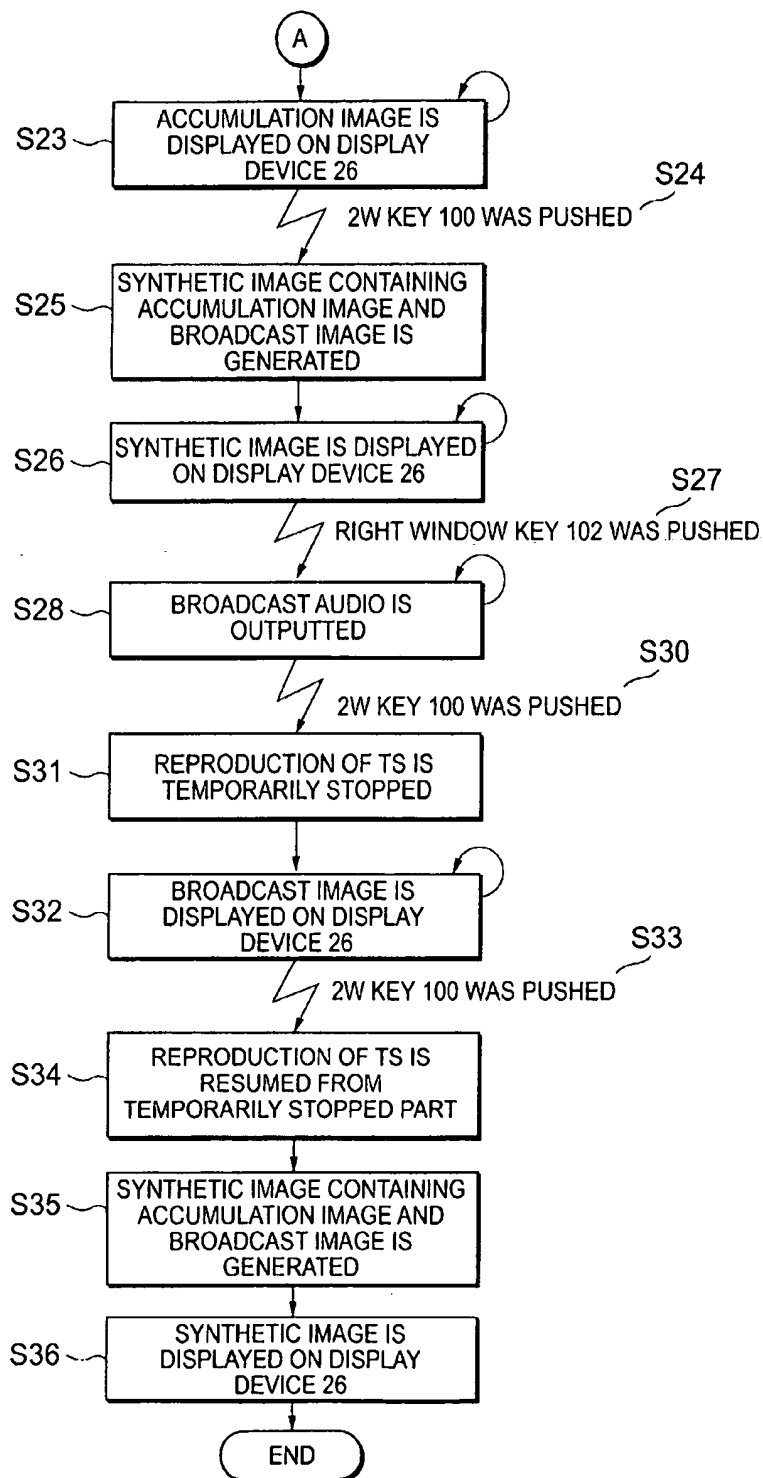


FIG. 6A

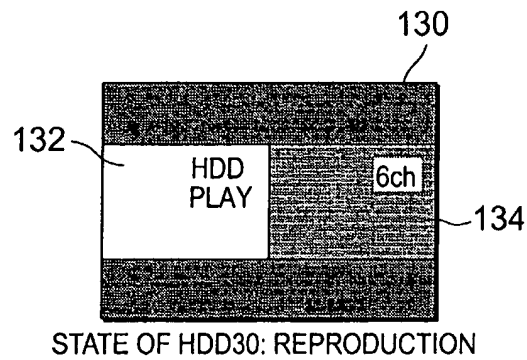

2W KEY 100 WAS PUSHED WHILE  
BROADCAST IMAGE IS SELECTED

FIG. 6B

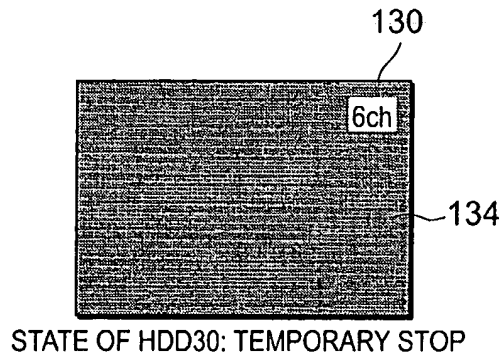

2W KEY 100 WAS PUSHED

FIG. 6C

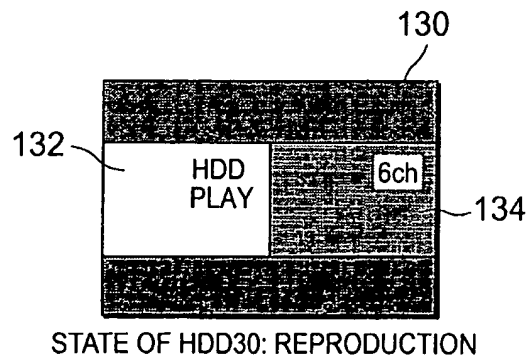


FIG. 7

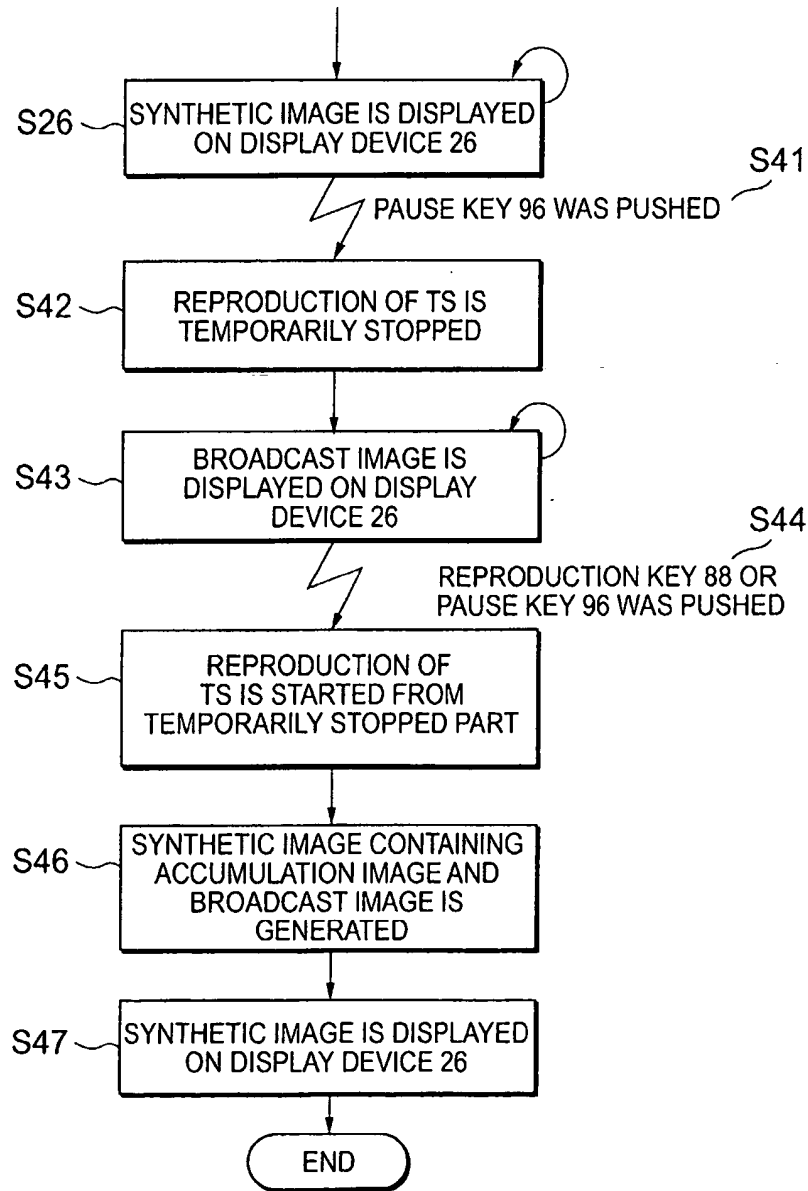


FIG. 8

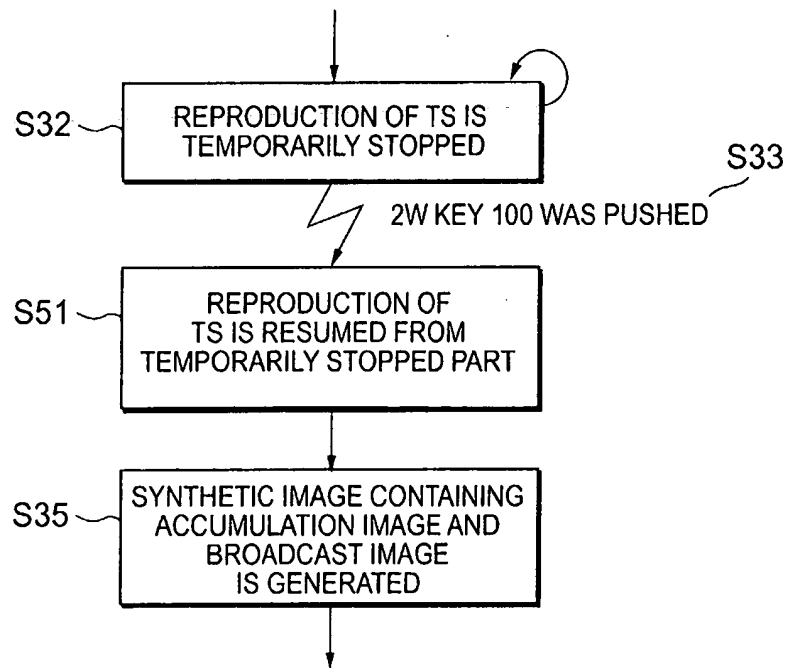


FIG. 9

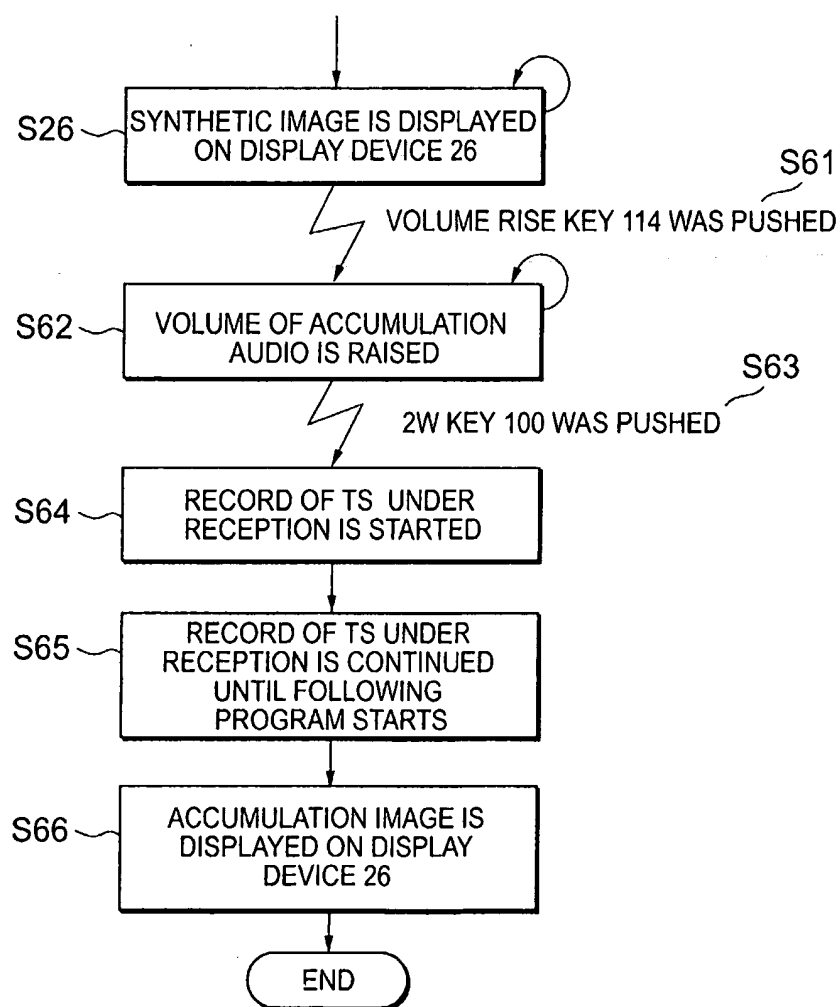


FIG. 10


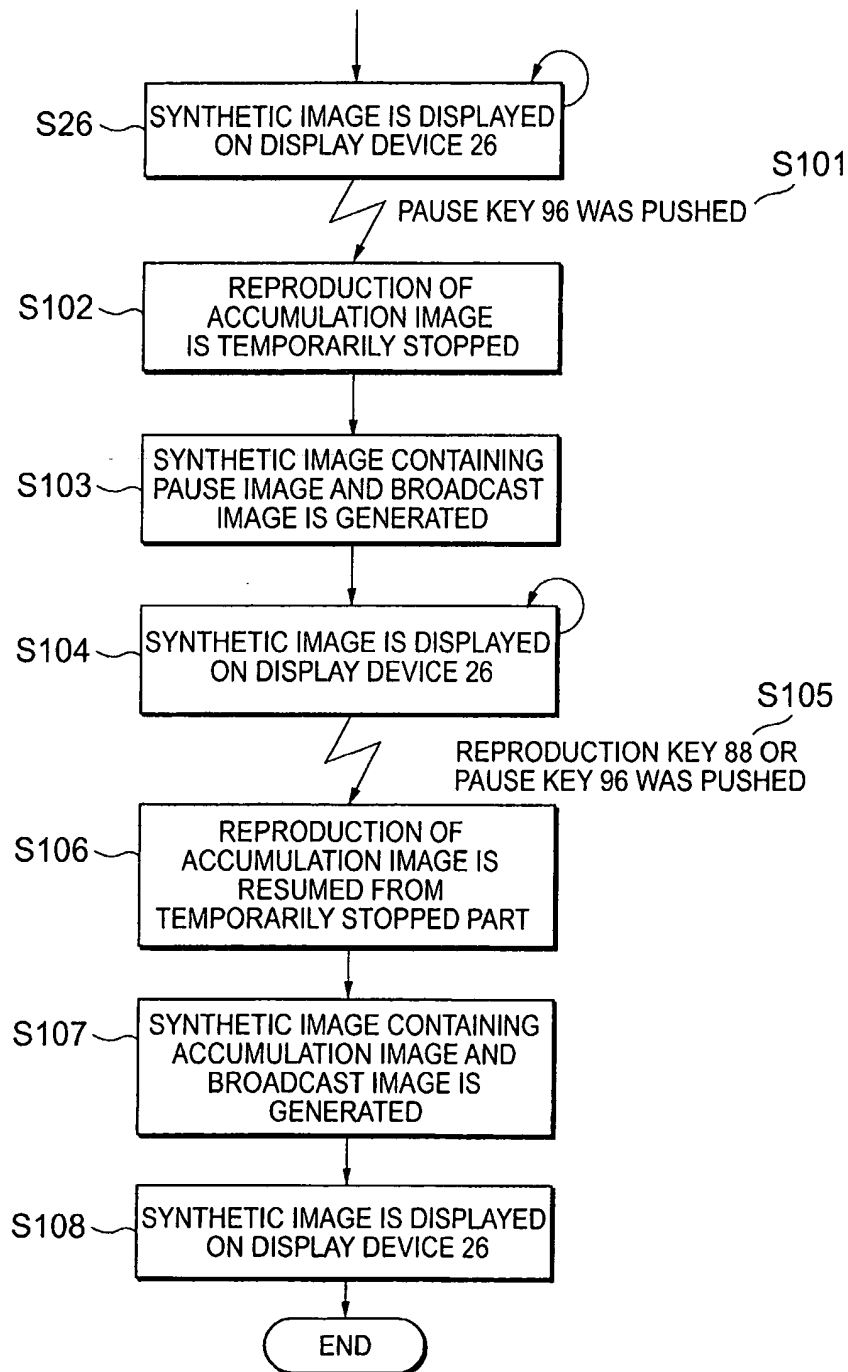


FIG. 11



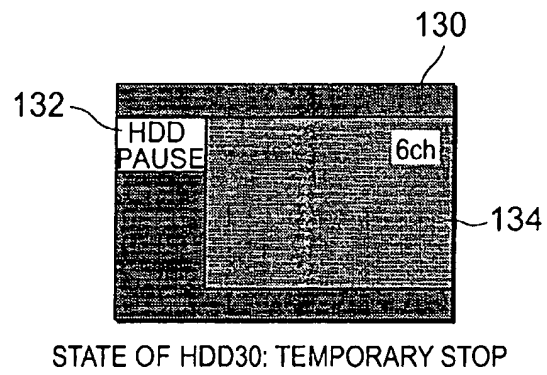

European Patent  
Office

# EUROPEAN SEARCH REPORT

Application Number  
EP 03 25 0351

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
X	WO 98 48566 A (MANKOVITZ ROY J ; GEMSTAR DEV CORP (US)) 29 October 1998 (1998-10-29) * abstract * * column 4, line 11 - column 9, line 37; claim 1 *	1-6	H04N5/00 H04N5/76
X	US 5 374 963 A (WILLIS DONALD H) 20 December 1994 (1994-12-20) * column 4, line 16 - column 5, line 58 * * column 7, line 67 - column 8, line 16 * * column 20, line 17-32; figures 1-3 *	7-12, 15-20	
			TECHNICAL FIELDS SEARCHED (Int.Cl.7)
			H04N
The present search report has been drawn up for all claims			
Place of search MUNICH		Date of completion of the search 21 May 2003	Examiner No11, B
<p>CATEGORY OF CITED DOCUMENTS</p> <p>X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document</p> <p>T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons δ : member of the same patent family, corresponding document</p>			

EPO FORM 1503 03.02 (P04C01)





European Patent  
Office

Application Number

EP 03 25 0351

### CLAIMS INCURRING FEES

The present European patent application comprised at the time of filing more than ten claims.

- ☐ Only part of the claims have been paid within the prescribed time limit. The present European search report has been drawn up for the first ten claims and for those claims for which claims fees have been paid, namely claim(s):
- ☐ No claims fees have been paid within the prescribed time limit. The present European search report has been drawn up for the first ten claims.

### LACK OF UNITY OF INVENTION

The Search Division considers that the present European patent application does not comply with the requirements of unity of invention and relates to several inventions or groups of inventions, namely:

see sheet B

- ☐ All further search fees have been paid within the fixed time limit. The present European search report has been drawn up for all claims.
- ☐ As all searchable claims could be searched without effort justifying an additional fee, the Search Division did not invite payment of any additional fee.
- ☒ Only part of the further search fees have been paid within the fixed time limit. The present European search report has been drawn up for those parts of the European patent application which relate to the inventions in respect of which search fees have been paid, namely claims:  
1-12, 15-20
- ☐ None of the further search fees have been paid within the fixed time limit. The present European search report has been drawn up for those parts of the European patent application which relate to the invention first mentioned in the claims, namely claims:



European Patent  
Office

**LACK OF UNITY OF INVENTION**  
**SHEET B**

Application Number  
EP 03 25 0351

The Search Division considers that the present European patent application does not comply with the requirements of unity of invention and relates to several inventions or groups of inventions, namely:

1. Claims: 1-6

Apparatus and method having first and second display modes wherein reproduction of a second image is stopped when switching to the second display mode.

2. Claims: 7-12, 15-20

Apparatus and method having a display modes for displaying two images from different sources wherein the images are not synthesized or the sizes of the images are changed when reproduction of a second image is stopped.

3. Claims: 13,14

Apparatus and method having first and second display modes wherein a first image signal is started to be recorded when reproduction of only a second image is desired.

**ANNEX TO THE EUROPEAN SEARCH REPORT  
ON EUROPEAN PATENT APPLICATION NO.**

EP 03 25 0351

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on  
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

21-05-2003

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO 9848566 A	29-10-1998	AU 7684198 A	13-11-1998
		EP 0978198 A2	09-02-2000
		JP 2001501068 T	23-01-2001
		WO 9848566 A2	29-10-1998
US 5374963 A	20-12-1994	AU 7907391 A	31-12-1991
		AU 7909591 A	31-12-1991
		AU 7960791 A	31-12-1991
		AU 7983391 A	31-12-1991
		AU 7996791 A	31-12-1991
		AU 8059091 A	31-12-1991
		AU 8064391 A	31-12-1991
		AU 8072591 A	31-12-1991
		AU 8076891 A	31-12-1991
		AU 8083991 A	31-12-1991
		AU 8084591 A	31-12-1991
		AU 8087191 A	31-12-1991
		AU 8185891 A	31-12-1991
		AU 8186091 A	31-12-1991
		AU 8211591 A	31-12-1991
		BR 9106539 A	25-05-1993
		CA 2082260 A1	02-12-1991
		CN 1057146 A ,B	18-12-1991
		CN 1057139 A ,B	18-12-1991
		CN 1057147 A ,B	18-12-1991
		CN 1057148 A ,B	18-12-1991
		CN 1057150 A ,B	18-12-1991
		CN 1057144 A ,B	18-12-1991
		CN 1057372 A ,B	25-12-1991
		CN 1057140 A ,B	18-12-1991
		CN 1057141 A ,B	18-12-1991
		CN 1057373 A ,B	25-12-1991
		CN 1057143 A ,B	18-12-1991
		CN 1057560 A	01-01-1992
		CN 1057142 A ,B	18-12-1991
		CN 1057149 A ,B	18-12-1991
		CN 1057138 A ,B	18-12-1991
		DE 4191157 C2	13-06-1996
		DE 4191157 T0	07-10-1993
		DE 4191166 C2	18-07-2002
		DE 4191166 T	01-04-1993
		DE 69125834 D1	28-05-1997
		DE 69125834 T2	31-07-1997
		DE 69125936 D1	05-06-1997
		DE 69125936 T2	21-08-1997
		DE 69126665 D1	31-07-1997

EPO FORM P0439

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82

**ANNEX TO THE EUROPEAN SEARCH REPORT  
ON EUROPEAN PATENT APPLICATION NO.**

EP 03 25 0351

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on  
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

21-05-2003

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 5374963 A	DE	69126665 T2	11-12-1997
	DE	69127193 D1	11-09-1997
	DE	69127193 T2	18-12-1997
	DE	69127194 D1	11-09-1997
	DE	69127194 T2	18-12-1997
	DE	69127286 D1	18-09-1997
	DE	69127286 T2	02-01-1998
	DE	69127897 D1	13-11-1997
-----			

EPO FORM P0459

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82

**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record**

**BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ **BLACK BORDERS**
- ☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☐ **FADED TEXT OR DRAWING**
- ☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☒ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER:** \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**